
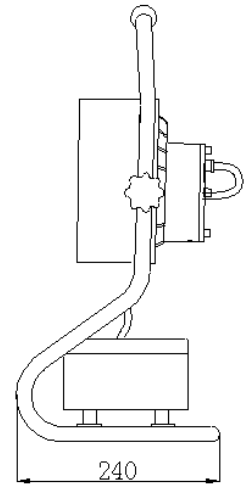



High power LED moveable working lamp

MYD003-40W

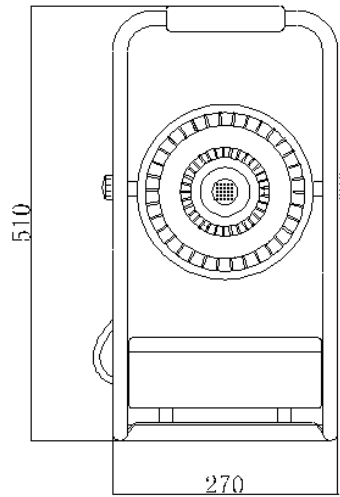


Light Distribution Curve

◆ ①

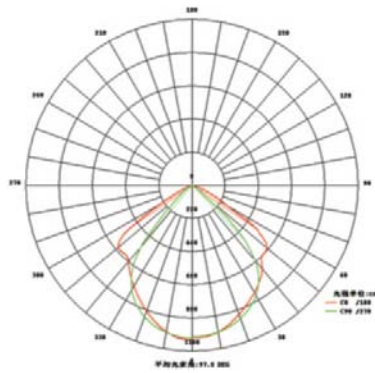

②

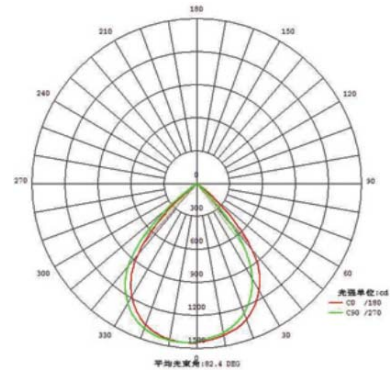

Technical parameters

Item	Mode	MYD004-40W
Battery Input Voltage		AC 100~240V
Power Frequency Range		47~63Hz
Power Factor(PF)		>0.95
Total Harmonic Distortion		<3%
Working Voltage		DC20V
LED Power Consumption		40W
System Consumption		43.2W
LED Luminous Efficiency		≥80Lm/W
LED Initial Flux		≥3200Lm
Lamp's Luminous Efficiency(%)		≥94%
Battery continuous operation time		5H
Maximum. Illumination (E) (The first lens)	3M height	114 lux
	4M height	68 lux
	5M height	44 lux
	6M height	31 lux
	7M height	23 lux
	8M height	18 lux
Effective Illuminated Area (The first lens)	3M height	9*9m2
	4M height	12*12m2
	5M height	15*15m2
	6M height	19*19m2
	7M height	22*22m2
	8M height	25*25m2
Color Temperature		2500K~7000K
Color Rendering Index(CRI)		Ra>80
Beam Angle		20° ~120°
Junction Temperature(TJ)		<70°C
Working Environment		working temperature -40°C ~ 60°C;working humidity 0~100%
IP Rating		IP67
Working Life		>50000hrs
Note: Lens can be changed according to client's specific requirement.		