
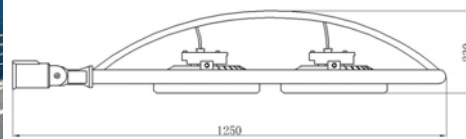



High power LED street lamp

Mode: ML008-100W*2

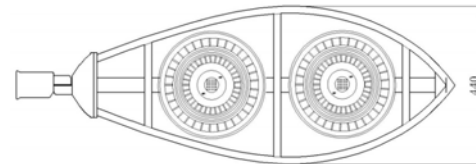


Light Distribution Curve

◆ ①

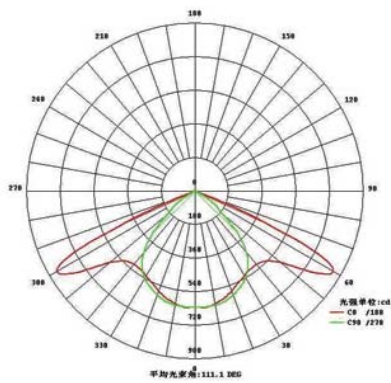

②

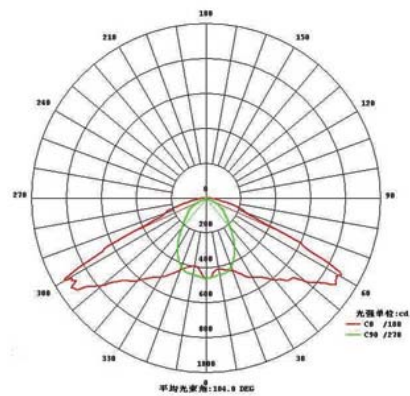

Technical parameters

Item	Mode	ML008-100W*2
Input Voltage		AC 85~265V
Power Frequency Range		47~63Hz
Power Factor(PF)		>0.95
Total Harmonic Distortion		<3%
Working Voltage		DC31V
LED Power Consumption		200W
System Consumption		216W
LED Luminous Efficiency		≥80lm/W
LED Initial Flux		≥16000lm
Lamp's Luminous Efficiency(%)		≥94%
Maximum. Illumination (E) (The first lens)	3M height	692lux
	4M height	384lux
	6M height	170lux
	8M height	94lux
	10M height	60lux
	12M height	42lux
Effective Illuminated Area (The first lens)	3M height	12*8 m2
	4M height	15*10m2
	6M height	24*15m2
	8M height	30*20m2
	10M height	38*25m2
	12M height	44*29m2
Color Temperature		2500K~7000K
Color Rendering Index(CRI)		Ra>80
Beam Angle		90° ~160°
Junction Temperature(TJ)		<70°C
Working Environment		working temperature -40°C~ 60°C;working humidity 0~100%
IP Rating		IP67
Working Life		>50000hrs
Note: Lens can be changed according to client's specific requirement.		