




# High power LED street lamp

Mode: ML021-100W\*2

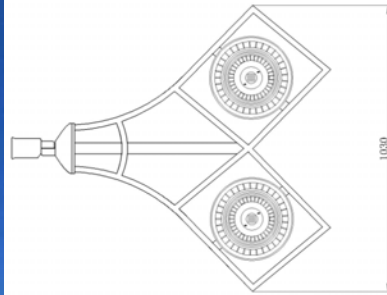


## Light Distribution Curve

◆ ①

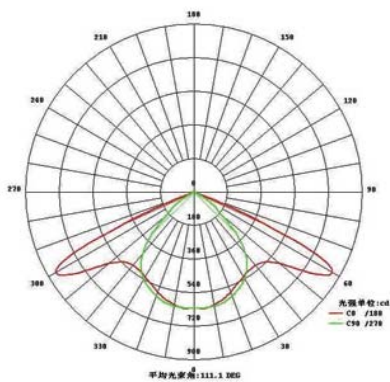

②

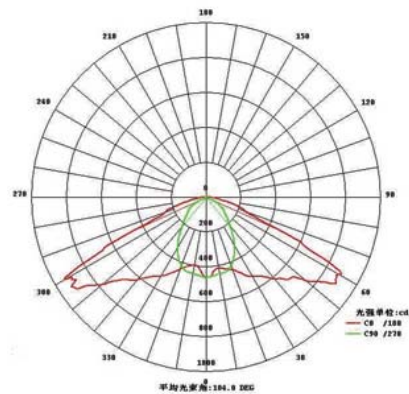

## Technical parameters

Item	Mode	ML021-100W*2
Input Voltage		AC 85~265V
Power Frequency Range		47~63Hz
Power Factor(PF)		>0.95
Total Harmonic Distortion		<3%
Working Voltage		DC31V
LED Power Consumption		200W
System Consumption		216W
LED Luminous Efficiency		≥80Lm/W
LED Initial Flux		≥16000Lm
Lamp's Luminous Efficiency(%)		≥94%
Maximum. Illumination (E)	3M height	692lux
	4M height	384lux
	6M height	170lux
	8M height	94lux
	10M height	60lux
	12M height	42lux
Effective Illuminated Area	3M height	12*8 m2
	4M height	15*10m2
	6M height	24*15m2
	8M height	30*20m2
	10M height	38*25m2
	12M height	44*29m2
Color Temperature		2500K~7000K
Color Rendering Index(CRI)		Ra>80
Beam Angle		90° ~160°
Junction Temperature(TJ)		<70°C
Working Environment		working temperature -40°C~ 60°C;working humidity 0~100%
IP Rating		IP67
Working Life		>50000hrs
<b>Note:</b> Lens can be changed according to client's specific requirement.		